



G UAN GZHOU V-SOLUCIÓN  
TECNOLOGÍA DE TEL E COMUNICACIONES  
CO., LTD.




Para más información, por favor escriba este código:



## V2804N-Z

1\*XPON+4GE+WiFi 4 HGU ONT

### Key Features:



ZTE+MTK Chipset  
High Performance Solution



XPON Dual Mode  
Automatically Access to  
EPON/GPON



WiFi IEEE802.11b/g/n  
2×2 5dBi Antenna  
Wide Coverage



Powerful Firewall




### Introduction:

V2804N-Z (4GE+WiFi 4 XPON ONT) is a broadband access device specially designed to meet the needs of fixed network operators for FTTH services.

The ONT is based on high-performance chip solutions, supports XPON dual-mode technology (EPON and GPON), and also supports IEEE802.11b/g/n WiFi 4 technology and other Layer 2/Layer 3 functions, providing data service for carrier-grade FTTH applications. In addition, the ONT also supports the OAM/OMCI protocol, and we can configure or manage various services of the ONT on the VSOL OLT.

The ONT has high reliability, is easy to manage and maintain, and has QoS guarantees for various services. It conforms to a series of international technical standards such as IEEE802.3ah and ITU-T G.984.

### Application Chart:

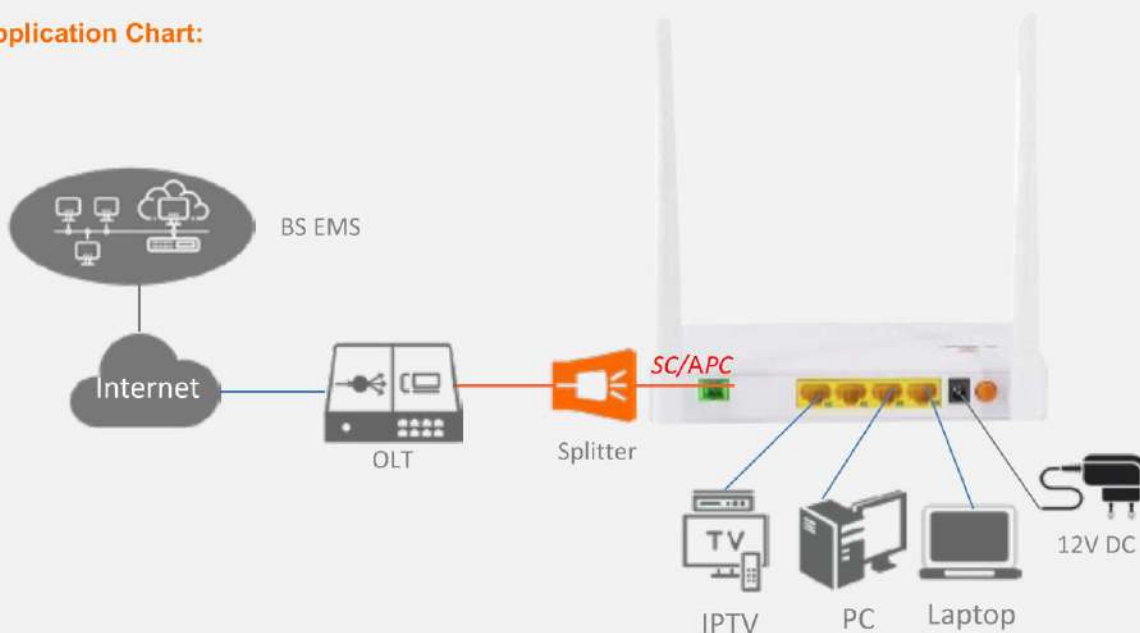

## ○ Hardware Parameter

Dimension	205mm×140mm×37m(L×W×H)
Net weight	0.34Kg
Operating condition	<ul style="list-style-type: none"> <li>• Operating temp: 0 ~ +50°C</li> <li>• Operating humidity:5 ~ 90%(non-condensed)</li> </ul>
Storing condition	<ul style="list-style-type: none"> <li>• Storing temp: -30 ~ +75°C</li> <li>• Storing humidity: 5 ~ 90% (non-condensed)</li> </ul>
Power adapter	DC 12V/1A,external AC-DC power adaptor
Power supply	≤10W
Interfaces	4GE+WiFi 4
Indicators	PWR, PON, LOS, WAN, FXS, ETH1~EH4, WPS, WIFI

## ○ Interface Parameter

PON interface	<ul style="list-style-type: none"> <li>• 1XPON port(EPON PX20+ &amp; GPON Class B+)</li> <li>• SC single mode, SC/APC connector</li> <li>• TX optical power: 0~+4dBm</li> <li>• RX sensitivity: -27dBm</li> <li>• Overload optical power: -3dBm(EPON) or -8dBm(GPON)</li> <li>• Transmission distance: 20KM</li> <li>• Wavelength: TX 1310nm, RX1490nm</li> </ul>
WIFI interface	<ul style="list-style-type: none"> <li>• Compliant with IEEE802.11b/g/n</li> <li>• Rate up to 300Mbps, 2T2R, 5dBi external antenna</li> <li>• Support: multiple SSID</li> <li>• Support 13 Channels</li> <li>• 2.4GHz Operating frequency: 2.412-2.477 GHz</li> <li>• TX power: 11n&lt;23dBm</li> </ul>
LAN interface	4*GE, Auto-negotiation,RJ45 ports

## ○ Function Data

XPON mode	Dual mode , Can access EPON/GPON OLTs(HUAWEI,ZTE,FiberHome, etc).
Connect Mode	Routing mode.
WiFi	<ul style="list-style-type: none"> <li>• IEEE802.11b/g/n(TX power:17dBm/16dBm/15dBm)</li> <li>• WiFi Authentication : WEP/WAP-PSK(TKIP) /WAP2-PSK(AES)</li> </ul>
Firewall	DDOS, Filtering Based on ACL/MAC/URL.
Layer2	802.1D&802.1ad bridge, 802.1p Cos, 802.1Q VLAN.
Layer3	IPv4/IPv6, DHCP Client/Server , PPPoE, NAT , DMZ ,DDNS.
Multicast	IGMP v1/v2/v3 , IGMP snooping.
Security	Flow & Storm control, Loop Detection.
O&M	<ul style="list-style-type: none"> <li>• WEB/TELNET/OAM/OMCI/TR069</li> <li>• Support private OAM/OMCI protocol</li> <li>• Unified network management of VSOL OLT</li> </ul>

Product Name	Product Description	Accessories
V2804N-Z	4GE+WiFi 4	12V/1A DC Adapter